

**Standards:**

ASTM A370 - 19  
ASTM B557 - 02  
ASTM D2256 - 02  
ASTM E8 - 01



**Material Type:**

WIRE, YARN, ROPE

**Type of Testing:**

TENSILE, GRIPS, SNUBBING

## 5,000 LBS CAPACITY SNUBBING TYPE WIRE TENSION GRIPS FOR UP TO 1/4" WIRE

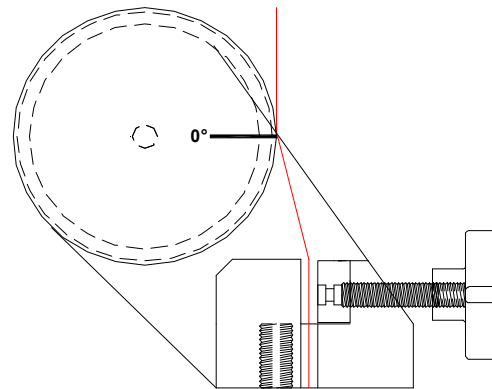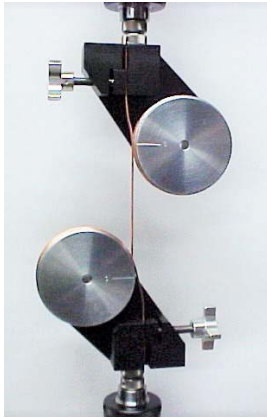

<b>Model No.</b>	<b>Specimen Size or Difference Between Fixtures</b>	<b>Construction</b>	<b>Temperature</b>
ASTM.A0370.61	1/4" Diameter	High strength steel	-120 to 250°F (-85 to 122°C)
ASTM.B0557.61	1/4" Diameter	High strength steel	-120 to 250°F (-85 to 122°C)
ASTM.D2256.10	1/4" Diameter	High strength steel	-120 to 250°F (-85 to 122°C)
ASTM.E0008.61	1/4" Diameter	High strength steel	-120 to 250°F (-85 to 122°C)
GRIP.40300.11	1/4" Diameter	High strength steel	-120 to 250°F (-85 to 122°C)

Fixture:	Mounting	1/2"-20 threaded couplings
	Capacity	5,000 lbs
	Weight	Approximately 20 lbs
	Dimensions	2" x 12" x 2"
	Standard	Manufactured in compliance with ASTM A370, B557, D2256 and E8

## **QUOTE**

Model No. ASTM.A0370.61 - 5,000 Lbs Snubbing Type Wire Tension Grips for Up to 1/4" Wire

The grips have a stationary positive screw clamp to secure the ends of the test specimen. Supplied with 1/2"-20 threaded couplings for mounting. Constructed of high strength steel with a protective finish and can handle a temperature range of -120 to 250°F (-85 to 122°C). Manufactured in compliance with ASTM A370, B557, D2256 and E8.

## **ACCESSORIES**

There are no accessories available for this fixture

## **SPARE PARTS**

Please contact us for spare or replacement parts

## **COMMON SIZE ADAPTERS**

### **Upper and Lower Mounting: 1/2"-20 Female Coupling**

Model No. M01S21 - 1/2" Male Clevis to 1/2"-20 Threaded Stud

Model No. M02S21 - 5/8" Male Clevis to 1/2"-20 Threaded Stud

Model No. M03S21 - 1.25" Male Clevis to 1/2"-20 Threaded Stud

Model No. M12S21 - 12mm Male Clevis to 1/2"-20 Threaded Stud

Model No. S36S21 - 1"-14 to 1/2"-20 Threaded Step Stud

Model No. LN21 - 1/2"-20 Threaded Locking Nut with Knurled OD