


**Standards:**  
ASTM C307 - 94  
ASTM C932 - 06

**Material Type:**  
MORTAR, GROUT, MONOLITHIC SURFACINGS

**Type of Testing:**  
TENSILE

## BRIQUET SPECIMEN TENSILE GRIPS FOR MORTAR, GROUTS AND MONOLITHIC MATERIALS

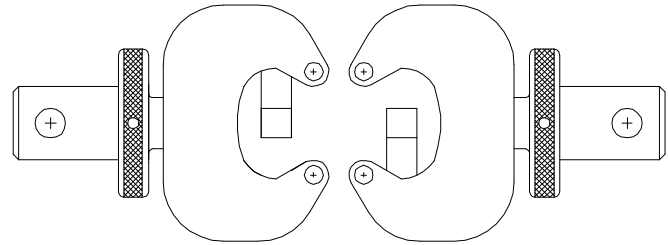

**Model No.**

ASTM.C0307.10  
ASTM.C0932.10

**Specimen Size or Difference Between Fixtures**

Hour glass shape and 1" thick  
Hour glass shape and 1" thick

**Construction**

Stainless steel  
Stainless steel

**Temperature**

-240 to 600°F (-152 to -318°C)  
-240 to 600°F (-152 to -318°C)

Specimen:	Molds	Molds available (request information)
Fixture:	Mounting	1"-14 threaded coupling
	Capacity	20,000 lbs (88.9 kN)
	Weight	15 lbs approximately
	Dimensions	Assembled 2" x 6" x 12"
	Standard	Manufactured in compliance with ASTM C307

## **QUOTE**

Model No. ASTM.C0307.10 - Briquet Tensile Grips

Grip set consists of an upper and lower grip with roller dowel pins at loading points. Supplied with 1"-14 threaded coupling for mounting in your testing frame. The fixture has a temperature range of -240 to 600°F (-152 to -318°C) and can handle a capacity of 20,000 lbs. Constructed from stainless steel. Manufactured in compliance with ASTM C307.

## **ACCESSORIES**

Model No. MOLD.C0307.1001 - Three Position Briquet Gang Mold

## **SPARE PARTS**

Please contact us for spare or replacement parts

## **COMMON SIZE ADAPTERS**

### **Upper and Lower Mounting: 1"-14 Threaded Coupling**

Model No. M03S36 - 1.25" Male Clevis to 1"-14 Threaded Stud

Model No. S42S36 - 1.25"-12 to 1"-14 Threaded Step Stud

Model No. S48S36 - 1.5"-12 to 1"-14 Threaded Step Stud

Model No. S60S36 - 2"-12 to 1"-14 Threaded Step Stud

Model No. LN36 - 1"-14 Threaded Locking Nut with Knurled OD

**EXTRA PHOTOS:**

