

Standards:

ASTM A194-08
ASTM A370-19
ASTM A962-07
ASTM F606-16
ISO 898 - 99



Material Type:

BOLTS

Type of Testing:

TENSILE, TENSION, PROOF LOAD, CONE PROOF

FASTENER TENSILE GRIPS FOR BOLTS SIZE UP TO 1/2" DIAMETER (30 KIP)

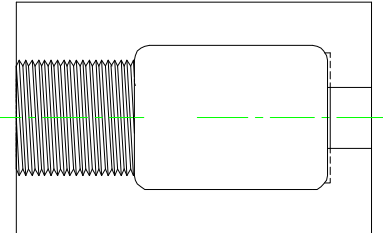

Model No.

ASTM.A0194.10
ASTM.A0370.50
ASTM.F0606.10
ISOS.00898.10

Specimen Size

#6 to 1/2" (M4 to M10) bolts
#6 to 1/2" (M4 to M10) bolts
#6 to 1/2" (M4 to M10) bolts
#6 to 1/2" (M4 to M10) bolts

Construction

High strength steel
High strength steel
High strength steel
High strength steel

Temperature

-120 to 250°F (-85 to 122°C)
-120 to 250°F (-85 to 122°C)
-120 to 250°F (-85 to 122°C)
-120 to 250°F (-85 to 122°C)

Fixture:	Washers	2 ea flat washers (1/4", 5/16", 3/8", 7/16", 1/2") 1 ea 10° wedge washers (1/4", 5/16", 3/8", 7/16", 1/2")
	Mounting	1.5"-12 threaded studs and locking nuts
	Capacity	30,000 lbs (88 kN)
	Weight	28 lbs approximately
	Dimensions	Assembled 3" x 3" x 12"
	Standard	Manufactured in accordance with ASTM A194, A370, A962, F606 and ISO 898

QUOTE

Model No. ASTM.F0606.10 - Fastener Tensile Grips For Bolt Sizes Up To 1/2" Diameter (30 Kip)

Bolt holder assembly for #6 to 1/2" (M4 to M10) bolts. 30,000 lbs capacity. Supplied with 1.5"-12 threaded male studs and locking nuts. Constructed of high strength steel with protective finish in accordance with ASTM A194, A370, A962, F606 and ISO 898.

Supplied with (2) ea of listed flat washers: (1/4", 5/16", 3/8", 7/16", 1/2")

Supplied with (1) ea of listed 10° wedge washers: (1/4", 5/16", 3/8", 7/16", 1/2")

ACCESSORIES

PLEASE SPECIFY DIAMETER OR THREAD

Model No. ACC.F0606.1003 - Plain Wedge Washer (6°) (ea) from M4 to M12 or #6 to 1/2"

Model No. ACC.F0606.1004 - Plain Wedge Washer (4°) (ea) from M4 to M12 or #6 to 1/2"

Model No. ACC.F0606.1005 - Threaded Flat Washer (ea) from M4 to M12 or #6 to 1/2"

Model No. ACC.F0606.1006 - Threaded Wedge Washer (6°) (ea) from M4 to M12 or #6 to 1/2"

Model No. ACC.F0606.1007 - Top Hat Style Short Bolt Adapter (ea)

Model No. ACC.F0606.1008 - Tensile Nut Proof Load Test Fixture

Includes a mandrel for a specific class 3A thread size, corresponding hardened loading washer, and retaining nut. Constructed of high strength steel with a protective black oxide finish in accordance with ASTM F606.

Model No. ACC.F0606.1009 - Compression Nut Proof Load Test Fixture

Model No. ACC.F0606.1010 - Set of (2) Tensile Proof Load Testing Nuts

SPARE PARTS

Model No. SPA.F0606.1001 - Plain Flat Washer (Set of 2) from M4 to M12 or #6 to 1/2"

Model No. SPA.F0606.1002 - Plain Wedge Washer (10°) (ea) from M4 to M12 or #6 to 1/2"

COMMON SIZE ADAPTERS

Upper and Lower Mounting: 1.5"-12 Male Studs and Locking Nuts

Model No. M03C48 - 1.25" Male Clevis to 1.5" -12 Coupling

Model No. C48S42 - 1.5" -12 Coupling to 1.25" -12 Stud

Model No. S60C48 - 2" -12 Stud to 1.5" -12 Threaded Coupling